


BugCrusherMicro

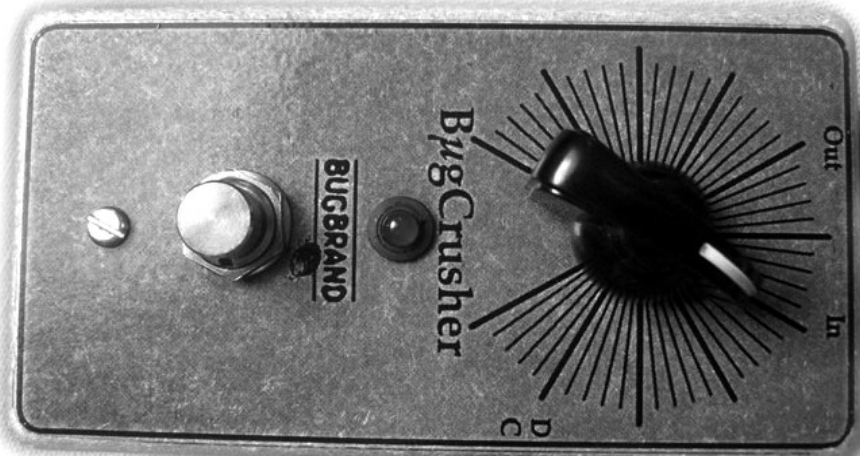

I hope you enjoy your new BugCrusherMicro pedal! Operation should be fairly straight forward, but just in case...

Input / Output - both sockets are mono 1/4" jacks. In standard pedal manner, power is only switched on when a jack is plugged to the In socket (a balanced or stereo plug *will not work!*) - you should, therefore, unplug the input jack when not in use to conserve battery power.

Power - 9v operation only. Either using a PP3 battery internally (remove the base to change) or standard Boss-style DC jack (Centre negative supply). When a DC jack is plugged in the battery is disconnected.

For questions or comments please email tom@bugbrand.co.uk

www.bugbrand.co.uk